STARLED®, INC.

STATUS INDICATORS / STACKLIGHT LEDs TO INTERCHANGE WITH INCANDESCENTS

ORDERING INFORMATION: SSB318 - 0 1 - 2
(A) (B) (C) (D)

(A) MODEL
SSB318 - 3 TIERS 18 LEDs
SSB324 - 3 TIERS 24 LEDs
FOR FLAT-TOP LEDS (ADD "F" to PART NUMBER)

(B) NUMBER OF LEDs
0 = (T-4½ SINGLE CONTACT BASE)
1 = (T-4½ DOUBLE CONTACT BASE)
2 = (6S6 CANDELABRA SCREW BASE)

(C) STANDARD DC & AC OPERATING VOLTAGES
1 = 24V
2 = 28V
3 = 48V
4 = 120V

ALL LAMPS ARE DUAL POLARITY
Note: Please call factory for other voltages.

MODEL: SSB318 XX-0X

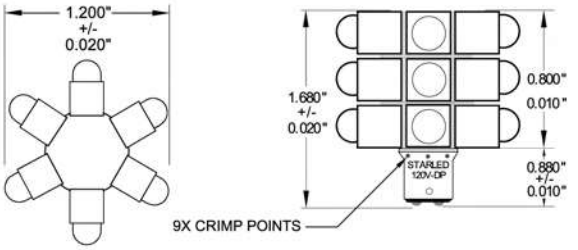

(D) LED EMITTING COLOR & WAVELENGTH
2 = ULTRA HI EFF. RED (623-630nm)
3 = ULTRA ORANGE (612-620nm)
*S4= ULTRA YELLOW (590-595nm)
*6NW= ULTRA PURE GREEN (520-530nm)
*8NW= FLUORESCENT "WHITE" (NO nm VALUE)
*10NW= ULTRA BLUE (465-475nm)
*12NW= SOFT WHITE (NO nm VALUE)
***MAX. CONTINUOUS CURRENT 10mA.**

ALL LED LENSES ARE WATER CLEAR

TOP VIEW



MODEL: SSB-324XX-0X

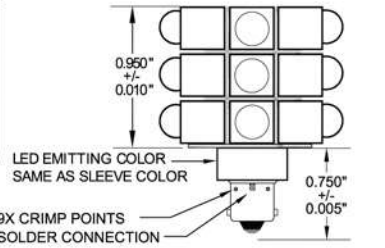

INDUSTRIAL APPLICATIONS
CONVEYOR SYSTEMS
AUTOMATED PRODUCTION LINES
MACHINE TOOLS
PRINTING PRESSES
TEXTILE MACHINES
PACKAGING SYSTEMS
TEST EQUIPMENT, ETC...

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

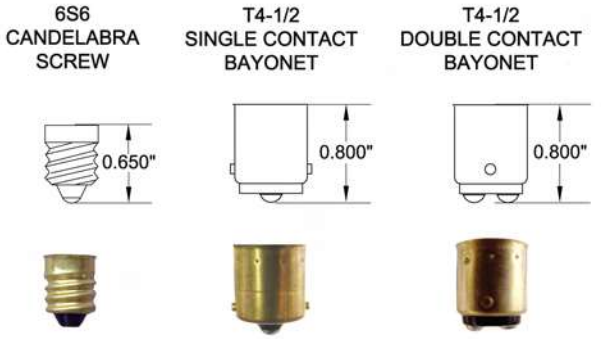

2059 E. DEL AMO BLVD. * RANCHO DOMINGUEZ, CA 90220 * TEL: (310) 603-0403 * FAX: (310) 603-1335