

KT-LED9.5PAR30S-F-9XX REPLACEMENT LAMP

DESCRIPTION

9.5W PAR30 Lamp | 2700–5000K |
>90 CRI | Standard Short Neck Flood



Enclosed
Fixture Rated



LAMP TYPE: PAR30

BASE TYPE: E26 (Medium)

WATTAGE: 9.5W

COLOR TEMPERATURE: 2700–5000K

COLOR RENDERING INDEX (CRI): >90

WARRANTY: 3 Years

RATED LIFE: L70 (25,000 Hours)

TYPICAL APPLICATIONS

- Track Lighting
- Display
- Flood and SpotLighting
- Outdoor fixtures (with suitable protection from the elements)

PRODUCT FEATURES

- Energy efficient, 80%+ energy savings over legacy equivalents
- Lower heat generation than legacy equivalents
- HiCRI LED's offer enhanced color rendering vs 80 CRI LED's, providing ideal clarity, representation, and uniformity of illuminated area/objects
- PF >0.90
- Complies with Part 15 of FCC
- Title 24 JA8 compliant (excluding 4000K and 5000K lamps)
- Title 20 Compliant
- Operating temperature range –4°F/–20°C to 113°F/45°C
- Long Life minimizes replacement and maintenance costs
- ANSI compliant construction ensures fitment for intended applications
- Meets Energy Star requirements
- UL Listed
- Rated for use in damp and wet location
- Smooth, uniform dimming
- Precision crafted full face optics for precise beam angle control
- Durable Plastic housing lowers the risk for breakage
- Suitable for use in open, enclosed, and recessed fixtures


ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Keystone Catalog Number	Description	Color Temp	Input Voltage	Rated Lamp Wattage	Legacy Equivalent Wattage	Base Type	Lumens	Energy Star CBCP	CRI	Light Distribution	Dimmable	Efficacy
KT-LED9.5PAR30S-F-927	PAR30 bulb. Standard short neck flood, dimmable	2700K	120V	9.5W	75W halogen	E26	800	1648	>90	40°	Yes	84 lm/W
KT-LED9.5PAR30S-F-930	PAR30 bulb. Standard short neck flood, dimmable	3000K	120V	9.5W	75W halogen	E26	800	1667	>90	40°	Yes	84 lm/W
KT-LED9.5PAR30S-F-940	PAR30 bulb. Standard short neck flood, dimmable	4000K	120V	9.5W	75W halogen	E26	850	1892	>90	40°	Yes	90 lm/W
KT-LED9.5PAR30S-F-950	PAR30 bulb. Standard short neck flood, dimmable	5000K	120V	9.5W	75W halogen	E26	850	1846	>90	40°	Yes	90 lm/W

KT-LED9.5PAR30S-F-9XX

REPLACEMENT LAMP

PHYSICAL CHARACTERISTICS

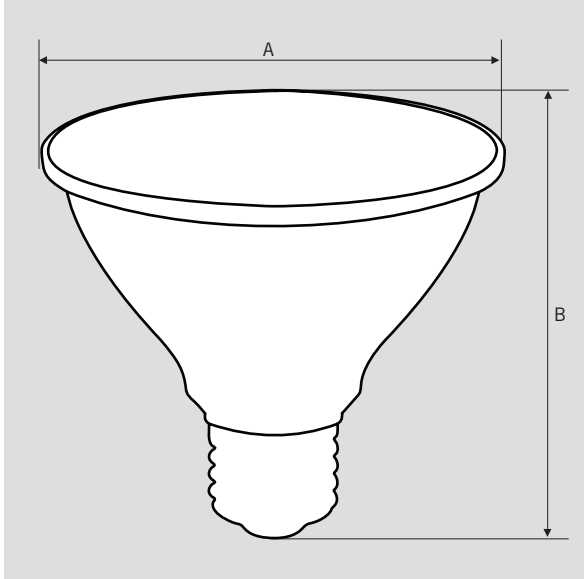

LAMP DIMENSIONS

A (Diameter)	3.78"
B (Length)	3.43"

BASE TYPE: E26 (Medium)

PACKAGING

Carton Quantity	24 pcs
Carton Dimensions	17.13" × 12.80" × 9.65"
Carton Weight	12.4 lbs

ORDERING INFORMATION

ORDER CODE	CARTON QUANTITY	ENERGY STAR UNIQUE ID	EASY CODE	UPC
KT-LED9.5PAR30S-F-927	24 pcs	2348810	HPW-31	843654124063
KT-LED9.5PAR30S-F-930	24 pcs	2348811	IDP-31	843654124070
KT-LED9.5PAR30S-F-940	24 pcs	2348812	BGC-04	843654124087
KT-LED9.5PAR30S-F-950	24 pcs	2348813	OLV-45	843654124094

CATALOG NUMBER BREAKDOWN

KT-LED9.5PAR30S-F-9XX

1 2 3 4 5 6 7 8

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 Short Neck
- 6 Standard Flood
- 7 900 Series
- 8 Color Temperature