



## KT-RKIT28AC-7C-9XX-FDIM

### DESCRIPTION

90 CRI AC LED Light Engine



### PRODUCT FEATURES

- L70 > 50,000 Hours
- Operating Temperature: 0°F-104°F, -18°C-40°C
- UL Classified
- High Factor >.90
- T24 JA8 Compliant (2700K and 3000K Only)
- Seoul LEDs
- Suitable for Fully Enclosed Fixtures
- THD <20%
- 5% Minimum Dimming, Low Flicker
- Comes with mounting accessories
- Pre-assembled with Metal Heatsink 5VA Cover

### PERFORMANCE SPECIFICATIONS

| Size     | Catalog Number          | Color Temp | CRI | Wattage | Lumens | Efficacy | Input Voltage | Dimming Method |
|----------|-------------------------|------------|-----|---------|--------|----------|---------------|----------------|
| 7" Round | KT-RKIT28AC-7C-927-FDIM | 2700K      | >90 | 28W     | 2046   | 74 lm/W  | 120V          | Phase Control  |
|          | KT-RKIT28AC-7C-930-FDIM | 3000K      | >90 | 28W     | 2160   | 80 lm/W  | 120V          | Phase Control  |
|          | KT-RKIT28AC-7C-940-FDIM | 4000K      | >90 | 28W     | 2220   | 82 lm/W  | 120V          | Phase Control  |
|          | KT-RKIT28AC-7C-950-FDIM | 5000K      | >90 | 28W     | 2280   | 83 lm/W  | 120V          | Phase Control  |

### COMPATIBLE DIMMERS

| Manufacturer | Model Number     |
|--------------|------------------|
| Lutron       | S-600PR-WH       |
| Lutron       | TGCL-153PH-WH    |
| Lutron       | MACL-153MH-LA    |
| LEVITON      | WA-RXX-06674-12A |

### EQUIVALENCES

- 2 x 75W Incandescent
- 2 x 18W CFL
- 32W T9 Circline


**Designed for 13" Ceiling Mount**

For questions on additional dimmer compatibility, please contact Keystone.



# KT-RKIT28AC-7C-9XX-FDIM

## DIMENSIONS

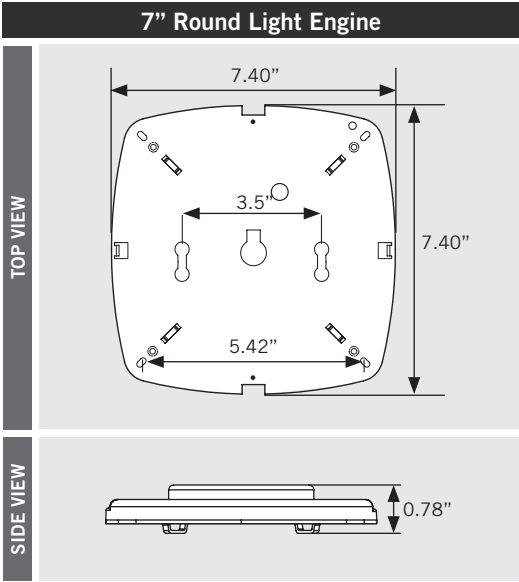

## CATALOG NUMBER BREAKDOWN

**KT-RKIT28AC-7C-9XX-FDIM**

**1 2 3 4 5 6 7 8**

- 1. Keystone Technologies
- 2. Future Fit Kit
- 3. Wattage
- 4. Alternating Current
- 5. 3" Circular
- 6. 900 Series
- 7. Color Temperature
- 8. Phase Control Dimming