



Specification Sheet

Catalog Number: MPS-250A-P-HP 250W Metal Halide Pulse Start

General Information

Lamp Type	250W MH-PS
ANSI Designation	M138 or M153
Line Voltage (V)	120/208/240/277/480
Regulation	10%
Frequency (Hz)	60
Recommended Fuse (A)	8/5/5/3/3
Circuit Type	CWA
Insulation Class	180°C
Capacitor Value	17 MF
Capacitor Voltage Rating	400 V
Cap. Temp. Rating	90°C
Winding Materials (Pri/Sec)	Cu/Cu
Lamp Starter	XG-04
Agency Certification	RU, cRU
Maximum Distance to Lamp	N/A

Wiring Diagram

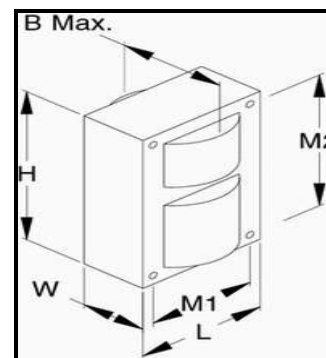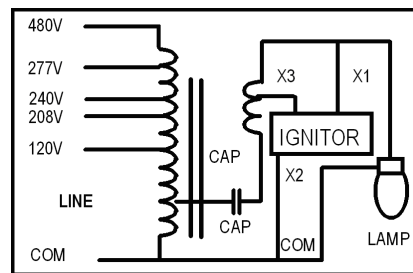

Electrical Characteristics

Line Volt (V)	Power Factor	Line Current (A)			Input Power (W)	Open Circuit Voltage (V)	Min Start Temp.	UL Temp. Code
		Operating	Open	Start				
120	High	2.43	2.32	1.51	284	281	-30°C	A
208	High	1.41	1.38	0.85	284	281	-30°C	A
240	High	1.22	1.17	0.77	284	281	-30°C	A
277	High	1.06	1.03	0.66	284	281	-30°C	A
480	High	0.60	0.60	0.38	284	281	-30°C	A

Physical Characteristics

Overall Dimensions (Inches)				Mounting Holes (Inches)			Bracket Dimension (Inches)		Ballast Net Weight (KG)	Lead Length (Inches)
Length	Width	Height	B max.	Diameter	M1	M2	Length	Width		
4.25	1.52	4.75	3.93	0.25	3.87	4.38	7.25	1.11	4.50	12-14