



# STARLED<sup>®</sup>, INC.

## SNAP-IN PANEL MOUNT INDICATOR LIGHT (MOUNTING HOLE DIA. 0.500"/0505")

ORDERING INFORMATION: PM14 1 C 1 - 24V/25 - B - W6  
(A) (B) (C) (D) (E) (F) (G)

### (A) MODEL & LENGTH

PM13= LOW PROFILE, FLAT LENS  
PM14= FLAT CYLINDRICAL LENS  
PANEL MOUNT THICKNESS= 0.200" / 0.100"

### (B) NUMBER OF LED CHIPS

1= 1, T-1 $\frac{3}{4}$  SINGLE CHIP LED  
6= 1, T-1 $\frac{3}{4}$  6 CHIP LED (**OBSELETE**)

### (C) LENS CAP COLOR

C= CLEAR TINTED  
WC= WATER CLEAR  
WD= WHITE DIFFUSE

NOTE: ALL LENSES ARE FLUTED

### (D) LED EMITTING COLOR & WAVELENGTH

- 1= ULTRA RED (660nm)
- 2= STD. RED (630-635nm)
- U2= ULTRA HI EFF. RED (623-630nm)
- 3= STD. ORANGE (605-610nm)
- U3= ULTRA ORANGE (612-620nm)
- S4= ULTRA YELLOW (590-595nm)
- 5= STD. GREEN (565-570nm)
- \*6NW= ULTRA PURE GREEN (520-530nm) (Single chip LED only)
- \*8NW= FLUORESCENT "WHITE" (NO nm VALUE) (Single chip LED only)
- \*10NW= ULTRA BLUE (465-475nm) (Single chip LED only)
- \*11NW= BLUISH GREEN (498-508nm) (Single chip LED only)
- \*12NW= SOFT WHITE (NO nm VALUE)

NOTE: \*MAX CONTINUOUS CURRENT 10mA.

\* NOT AVAILABLE IN 6 CHIP LED.

### (E) STANDARD OPERATING VOLTAGES /mA.

SINGLE CHIP LED: 12V/25, 24V/25, 28V/25, 48V/12 & 120VAC/6

6 CHIPS LED: 12V/30, 24V/15, 28V/15, 48V/12 & 120VAC/6

FOR OTHER VOLTAGES PLEASE CALL FACTORY

### (F) HOUSING COLOR

B = BLACK  
W= WHITE



### (G) TERMINAL TYPES

W6= WIRE TERMINALS 6" STANDARD LEGTH  
20ga UL1015 INSULATION (CALL FACTORY FOR OTHER LEGTHS)  
T= METAL TERMINAL (THICKNESS 0.20" / 0.190" WIDTH)  
W= WIRE LEADS

NOTE: MATERIAL: BODY UL94-V0  
PRESS FIT (NO MOUNTING HARDWARE NECESSARY)

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

### MODEL PM131/6

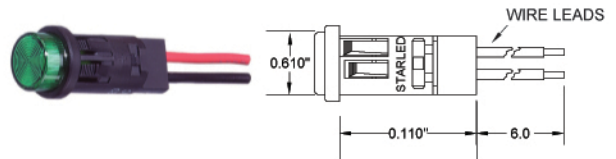

### MODEL PM141/6

