STARLED®, INC.

SNAP-IN PANEL MOUNT INDICATOR LIGHT (MOUNTING HOLE DIA. 0.500"/0505")

ORDERING INFORMATION:

PM14	1	C	1	-	24V/25	-	B	-	W6
(A)	(B)	(C)	(D)		(E)		(F)		(G)

(A) MODEL & LENGTH

PM13= LOW PROFILE, FLAT LENS
PM14= FLAT CYLINDRICAL LENS
PANEL MOUNT THICKNESS= 0.200" / 0.100"

(B) NUMBER OF LED CHIPS

1= 1, T-1¾ SINGLE CHIP LED
6= 1, T-1¾ 6 CHIP LED

MODEL PM131/6



(C) LENS CAP COLOR

C= CLEAR TINTED
WC= WATER CLEAR
WD= WHITE DIFFUSE
NOTE: ALL LENSES ARE FLUTED

(D) LED EMITTING COLOR & WAVELENGTH

1= ULTRA RED (660nm)
2= STD. RED (630-635nm)
U2= ULTRA HI EFF. RED (623-630nm)
3= STD. ORANGE (605-610nm)
U3= ULTRA ORANGE (612-620nm)
S4= ULTRA YELLOW (590-595nm)
5= STD. GREEN (565-570nm)
*6NW= ULTRA PURE GREEN (520-530nm) (Single chip LED only)
*8NW= FLUORESCENT "WHITE" (NO nm VALUE) (Single chip LED only)
*10NW= ULTRA BLUE (465-475nm) (Single chip LED only)
*11NW= BLUISH GREEN (498-508nm) (Single chip LED only)
*12NW= SOFT WHITE (NO nm VALUE)
NOTE: *MAX CONTINUOUS CURRENT 10mA.
*** NOT AVAILABLE IN 6 CHIP LED.**

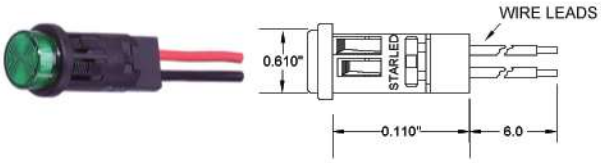

MODEL PM141/6

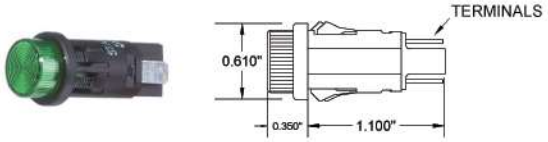

(E) STANDARD OPERATING VOLTAGES /mA.

SINGLE CHIP LED: 12V/25, 24V/25, 28V/25, 48V/12 & 120VAC/6
6 CHIPS LED: 12V/30, 24V/15, 28V/15, 48V/12 & 120VAC/6
FOR OTHER VOLTAGES PLEASE CALL FACTORY

(F) HOUSING COLOR

B = BLACK
W= WHITE



(G) TERMINAL TYPES

W6= WIRE TERMINALS 6" STANDARD LEGTH
20ga UL1015 INSULATION **(CALL FACTORY FOR OTHER LEGTHS)**
T= METAL TERMINAL (THICKNESS 0.20" / 0.190" WIDTH)
W= WIRE LEADS

NOTE: MATERIAL: BODY UL94-V0
PRESS FIT (NO MOUNTING HARDWARE NECESSARY)

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

2059 E. DEL AMO BLVD.* RANCHO DOMINGUEZ, CA 90220 * TEL: (310) 603-0403 * FAX: (310) 603-1335