STARLED®, INC.

SNAP-IN PANEL MOUNT INDICATOR LIGHT (MOUNTING HOLE DIA. 0.155" TO 0.158")

ORDERING INFORMATION: PM151 C 1 - 24V/13 - W6
(A) (B) (C) (D) (E)

(A) MODEL NUMBER
PM151 – T1-3mm SINGLE CHIP LED
PANEL THICKNESS = 0.031" TO 0.062"

(B) LED LENS COLOR
C = CLEAR TINTED
D = DIFFUSE
WC = WATER CLEAR

(C) LED EMITTING COLOR & WAVELENGTH
1 = ULTRA RED (660nm)
2 = STD. RED (630-635nm)
U3 = ULTRA ORANGE (612-620nm)
3 = STD. ORANGE (605-610nm)
U4 = ULTRA YELLOW (590-595nm)
5 = STD. GREEN (565-570nm)
*6NW = ULTRA PURE GREEN (520-530nm)
*8NW = FLUORESCENT "WHITE" (NO nm VALUE)
*10NW = ULTRA BLUE (465-475nm)
*11NW = BLUISH GREEN (498-508nm)
*12NW = SOFT WHITE (NO nm VALUE)
NOTE: *MAX CONTINUOUS CURRENT 10mA.
***AVAILABLE IN WATER CLEAR LENS ONLY.**

WIRE LEADS

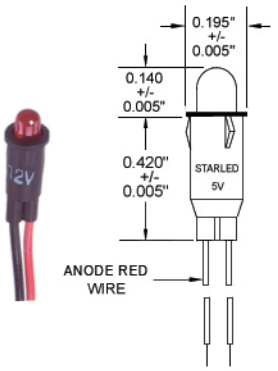

(D) STANDARD OPERATING VOLTAGES / mA.
5V/13, 12V/13, 24V/13, & 28V/13

(E) TERMINALS TYPE
W6 = WIRE TERMINALS 6.0" STANDARD LENGTH
24ga UL1061 INSULATION (Call factory for other lengths)

T = TERMINAL (Resistor Lead)

TERMINAL LEADS



HOUSING MAT'L. UL94-VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

2059 E. DEL AMO BLVD.* RANCHO DOMINGUEZ, CA 90220 * TEL: (310) 603-0403 * FAX: (310) 603-1335