



# STARLED<sup>®</sup>, INC.

PANEL MOUNT INDICATOR LIGHT  
FOR 5/16" (0.312) MOUNTING HOLE

ORDERING INFORMATION:  $\frac{\text{PME320}}{\text{(A)}} \quad \frac{\text{R}}{\text{(B)}} - \frac{1}{\text{(C)}} \quad \frac{\text{C}}{\text{(D)}}$

**(A) MODEL NUMBER**

PME320 - COMPLETE ASSEMBLY (BODY AND LENS)  
PME320B - BODY ASSEMBLY ONLY  
PME320L - LENS ASSEMBLY ONLY  
PME321 - COMPLETE ASSEMBLY, WATER TIGHT  
PME321L - LENS ASSEMBLY ONLY, WATER TIGHT

**(B) LENS COLOR**

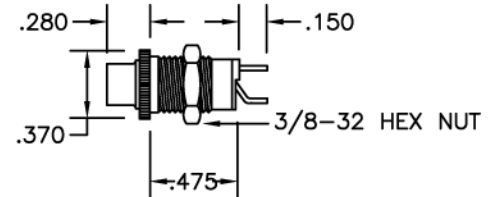
R - RED  
A - AMBER  
G - GREEN  
W - WHITE  
C - WATER CLEAR

**(C) LENS STYLE**

1 - STANDARD LENS  
2 - LENS WITH SHROUD

**(D) BODY FINISH**

B - BLACK FINISH  
C - BRIGHT NICKEL PLATE

**NOTES:**

1. MEETS ALL THE APPLICABLE REQUIREMENTS OF MIL-L-3661.
2. MATERIALS: BODY AND MOUNTING HARDWARE - NICKEL PLATED BRASS, LENS- HIGH IMPACT PLASTIC, TERMINALS - TIN PLATED BRASS.
3. USES T-1 SUB-MIDGET FLANGE BASE LAMPS (INCANDESCENT OR LED). SEE SPECIFICATIONS FOR MODEL SMF38.
4. BODY IS INSULATED FROM ELECTRICAL CONTACT.
5. FOR EMI/RFI SHIELDED UNITS, ADD RFI AT THE END OF PART NUMBER.
6. CENTER TO CENTER SPACING: 15/32 MINIMUM.
7. MAXIMUM PANEL THICKNESS: 1/4".
8. ALSO AVAILABLE WITH REAR MOUNTING CONFIGURATION. ORDER MODEL 322.