STARLED®, INC.

SNAP-IN PANEL MOUNT INDICATOR LIGHT (MOUNTING HOLE DIA. 0.312")

ORDERING INFORMATION: PMS301 C 1 - 24V/25 - W6
(A) (B) (C) (D) (E)

(A) MODEL NUMBER
PMF301 = 1, T1-3/4 5mm SINGLE CHIP LED
PMS301 = 1, T1-3/4 5mm SINGLE CHIP LED
PANEL MOUNT THICKNESS = 0.031" TO 0.062"

(B) LENS CAP COLOR
C = CLEAR TINTED
Note: ALL LENSES ARE FLUTED

(C) LED EMITTED COLOR & WAVELENGTH
1 = ULTRA RED (660nm)
2 = STD. RED (630-635nm)
U2 = ULTRA HI EFF. RED (623-630nm)
U3 = ULTRA ORANGE (612-620nm)
3 = STD. ORANGE (605-610nm)
S4 = ULTRA YELLOW (590-595nm)
5 = STD. GREEN (565-570nm)
*6NW = ULTRA PURE GREEN (520-530nm)
*8 NW= FLUORESCENT "WHITE" (NO nm VALUE)
*10 NW= ULTRA BLUE (465-475nm)
*11NW = BLUISH GREEN (498-508nm)
*12 NW= SOFT WHITE (NO nm AVAILABLE)
Note: *Max continuous current 10mA.

(D) STANDARD OPERATING VOLTAGES / mA.
5V/13, 12V/13, 24V/25 & 28V/25
Note: Please call fatory for other voltages.

(E) TERMINALS TYPE
W6 = WIRE TERMINALS 6.0" STANDARD LENGTH
24ga UL1007 INSULATION (Call factory for other lengths)

HOUSING MAT'L. UL94-VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

MODEL PMF301



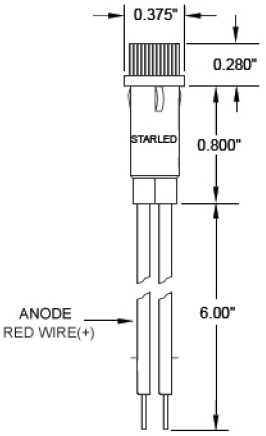
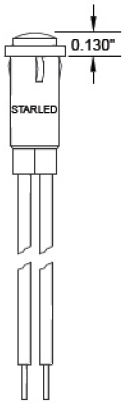
MODEL PMS301