FLAT-TOP & DOMED SINGLE CHIP LED T3-¼ BAYONET BASE LEDs

ORDERING INFORMATION: MB116 (A) 1 (B) WC (C) 1 (D) - 24V/25 (E) - DP (F)

(A) MODEL
MB116 = PLAIN SLEEVE DOMED LED
RMB116 = RIBBED SLEEVE DOMED LED
MBF116 = PLAIN SLEEVE FLAT-TOP LED
RMBF116 = RIBBED SLEEVE FLAT-TOP LED

(B) NUMBER OF LEDs
1 = 1, SINGLE CHIP T1-3/4 LED

(C) LED LENS COLOR
WC = WATER CLEAR

(D) LED EMITTING COLOR & WAVELENGTH
1 = ULTRA RED (660nm)
2 = STD. RED (630-635nm)
U2 = ULTRA HI EFF. RED (623-630nm)
3 = STD. ORANGE (605-610nm)
U3 = ULTRA ORANGE (612-620nm)
4 = STD. YELLOW (585nm)
U4 = ULTRA YELLOW (590-595nm)
5 = STD. GREEN (565-570nm)
*6NW = ULTRA PURE GREEN (520-530nm)
*8NW = FLUORESCENT "WHITE" (NO nm VALUE)
*10NW = ULTRA BLUE (465-475nm)
*11NW = BLUISH GREEN (498-508nm)
*12NW = SOFT WHITE (NO nm VALUE)
***Max. Continuous current 10mA.**

(E) STANDARD DC & AC OPERATING VOLTAGES/mA
SINGLE LED: 5V/25, 12V/25, 24V/25, 28V/25, 36V/12, 48V/12, 60V/12 & 120V/6
Max. Continuous current @ 120V/6 mA.
***Voltages from 5-60V/10mA**
Note: Please call factory for other voltages.

(F) CENTER CONTACT POLARITY
DP = DUAL POLARITY

DIRECT INCANDESCENT LAMP REPLACEMENTS
6MB, 12MB, 14MB, 24MB, 28MB, 48MB, 60MB, 120MB, 1819, 1828, 1835, ETC...

MODEL: MB116

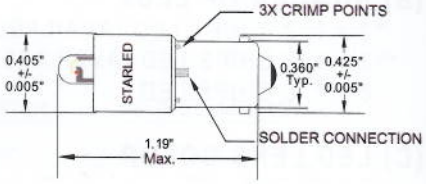

MODEL: RMB116

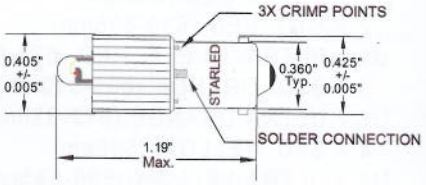

MODEL: MBF116

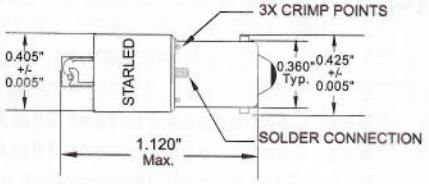
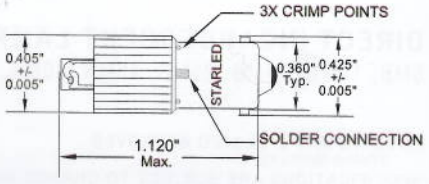
MODEL: RMBF116