



Alkco's Ambient Recessed Downlights are the perfect compliment to the RelaxView LED Ambient Ceiling illuminators. They are an ideal lighting solution for any healthcare imaging space. This fixture best suits spaces with non-ferrous construction and EMI control requirements. This offering supports a relaxing environment through its clean aesthetic and uniform light appearance ultimately providing patients with comfort, calmness and ease during imaging experiences.

Project:	
Location:	
Cat.No:	
Type:	
Lamps:	Qty:
Notes:	

Ordering guide

example: RVAD6G-42-SWH

Model Number	LED Color Temp.	Finish
—	—	—
RVAD6G 6" Downlight Grid RVAD6F 6" Downlight Flange	35 3500K 42 4200K	SWH Soft white CC ¹ Custom color

Footnotes:

¹ Customer to provide color chip to match.

RVAD Relaxview Ambient Recessed Downlight

3500K or 4200K


Features

- Easy installation and requires minimal maintenance.
- Long life LED source.
- Available in neutral white (3500K or 4200K).
- Available for grid or flange ceiling installations.
- Agion® antimicrobial finish.
- Class 1 low voltage installation.
- Dimming option available on RelaxView Power Distribution Module PDM.
- On/Off and dimming control available with addition of RelaxView Intelligent Wall Dimmer IWD.

Specifications

- **Construction:** Non-ferrous construction. Spun aluminum housing with a 1/8" translucent white PMMA acrylic lens and aluminum trim ring.
- **Finish:** The housing has a polyester powder-coat paint finish with an Agion® antimicrobial finish.
- **Light Source:** LED source for lower power consumption and uniformity, attached to heat-sink for maximum performance and reliability. The LED source is available in 3500K or 4200K white.
- **Electrical:** RelaxView is powered by remote Class 1 low voltage power distribution module(s) (sold separately). Dimming is available. The RelaxView panels do not include a DC power supply. Remote modular Power Distribution Module PDM needed with or without dimmer.
- **Installation:** Easy installation into standard grid or hard ceilings.
- **Listing:** Components are CE or ETL listed and RoHS compliant.
- **Warranty:** Fixture warranted against defects for 5 years from original date of purchase.

Dimensions

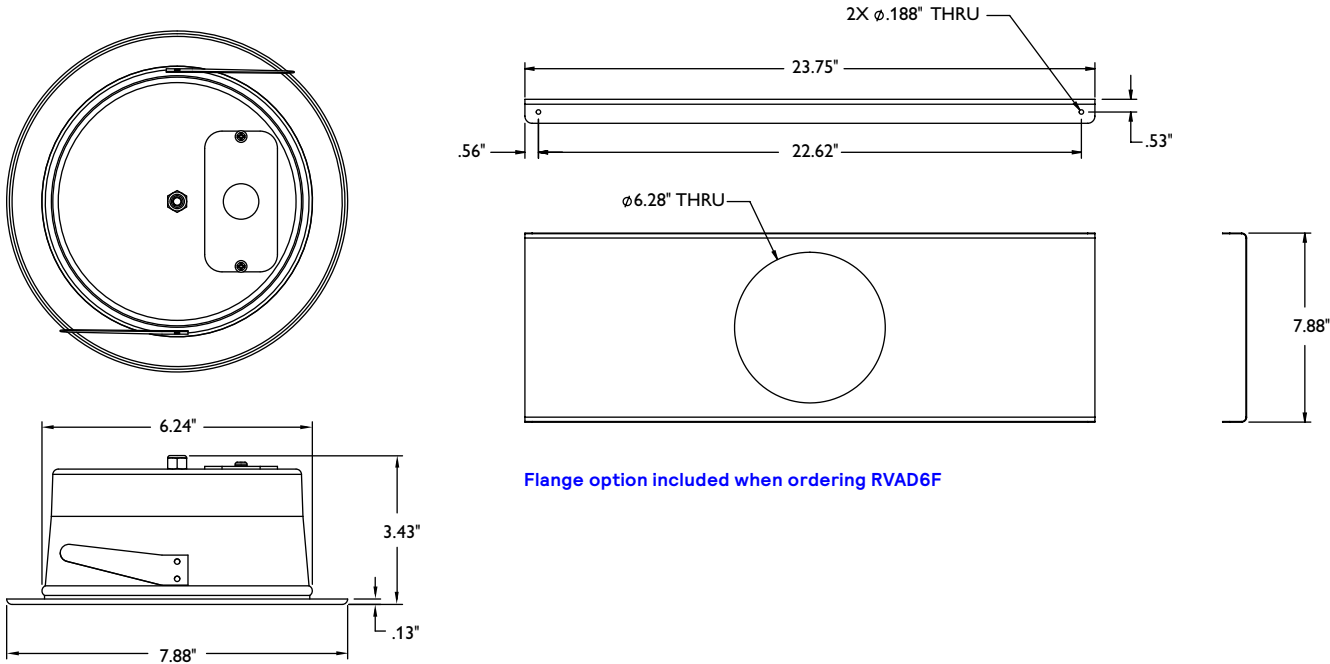

Electrical Data

Model	RVAD6
Power (Watts)	10.6

3500K or 4200K