



T-1 SUB-MIDGET FLANGE BASE SINGLE CHIP DOME AND FLAT-TOP LEDs

ORDERING INFORMATION: SMF381 D 2 - 2VF - PC
(A) (B) (C) (D) (E)

(A) MODEL

SMF381
SMFF381 (FLAT-TOP) DISCONTINUED

(B) LED LENS COLOR

D = DIFFUSE
WC = WATER CLEAR

(C) LED EMITTING COLOR & WAVELENGTH

- 1 = ULTRA RED (660nm) **OBSOLETE**
- 2 = STD. RED (630-635nm)
- U2 = ULTRA HI EFF, RED (623-630nm)
- 3 = STD. ORANGE (605-610nm)
- U3 = ULTRA ORANGE (612-620nm)
- 4 = STD. YELLOW (585nm)
- *S4 = ULTRA YELLOW (590-595nm)
- 5 = STD. GREEN (565-570nm)
- *6NW = ULTRA PURE GREEN (520-530nm)
- *8NW = FLUORESCENT "WHITE" (NO nm VALUE)
- *10NW = ULTRA BLUE (465-475nm)
- *12NW = SOFT WHITE (NO nm VALUE)
- *MAX. CONTINUOUS CURRENT 10mA.**

(D) STANDARD DC & AC OPERATING VOLTAGES

- * 2VF, 5V & 12V.
- * EXTERNAL RESISTOR IS REQ. TYP. 3.5VF.
- * WATER CLEAR LENS ONLY

NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES.


(E) CENTER CONTACT POLARITY

PC = POSITIVE CENTER, NC = NEGATIVE CENTER

DIRECT INCANDESCENT LAMP REPLACEMENTS

CALL FACTORY

MODEL: SMF381

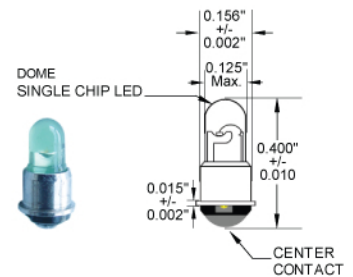

MODEL: SMFF381

