



STARLED[®], INC.

BASED LEDs

T-3/4 WEDGE BASE SINGLE CHIP, 6 CHIP, & 6-7 CLUSTER LEDs

ORDERING INFORMATION: WB95 1 WC 1 - 24V/25
(A) (B) (C) (D) (E)

(A) MODEL
WB95


(B) NUMBER OF LEDs
1 = SINGLE CHIP T1-3/4 LED
6 = 1, 6 CHIP T1-3/4 LED
06 = 6 (T1 3mm CLUSTER LED)
07 = 7 (T13mm CLUSTER LED)

(C) LED LENS COLOR
WC = WATER CLEAR (SINGLE CHIP)
C = CLEAR (6 CHIPS)


(D) LED EMITTING COLOR & WAVELENGTH
1 = ULTRA RED (660nm) OBSOLETE 5,6 & 7 CLUSTER ONLY
2 = STD. RED (630-635nm)
U2 = ULTRA HI EFF. RED (623-630nm)
3 = STD. ORANGE (605-610nm)
U3 = ULTRA ORANGE (612-620nm)
4 = STD. YELLOW (585nm)
U4 = ULTRA YELLOW (590-595nm)
5 = STD. GREEN (565-570nm)
*6NW = ULTRA PURE GREEN (520-530nm)
*8NW = FLUORESCENT "WHITE" (NO nm VALUE)
*10NW = ULTRA BLUE (465-475nm)
*12NW = SOFT WHITE (NO nm VALUE)
*Max. Continuous current 10mA.
*AVAILABLE IN SINGLE AND CLUSTER LED ONLY.

(E) STANDARD DC & AC OPERATING VOLTAGES/mA
SINGLE LED: 5V/25, 12V/25, 24V/25, 28V/25, 36V/12, 48V/12 & 60V/12
6 CHIP LED: 6V/45, 14V/30, 24V/15, 28V/15, 36V/12, 48V/12 & 60V/15
6 CLUSTER LED: 6V/50, 12V/50 & 14V/50
7 CLUSTER: 18V/25, 24V/25, 28V/25, 36V/25, 48V/12 & 60V/15
APPLICATION MUST BE SPECIFIED WHEN ORDERING:
VAC = ALTERNATING CURRENT VDC(V) = DIRECT CURRENT
Note: Please call factory for other voltages.


MODEL: WB95

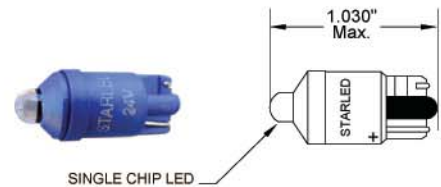

MODEL: WB95

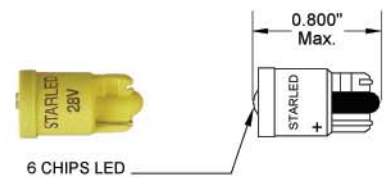

MODEL: WB95

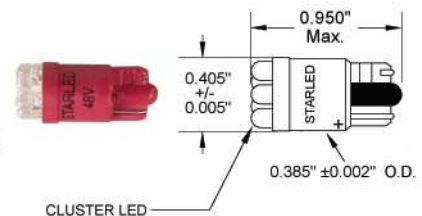

DIRECT INCANDESCENT LAMP REPLACEMENTS

124, 158, 159, 161, 168, 184, 192, 194, 259, 280, 400, 464, 555, 656, 657, 658, 758 ETC...

HOUSING MAT'L. UL94-VO APPROVED
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE