



T-3¼ WEDGE BASE SINGLE CHIP, 6 CHIP & 6-7 CLUSTER LEDs

ORDERING INFORMATION: WB95 1 WC 2 - 24V/2
(A) (B) (C) (D) (E)

(A) MODEL
WB95

(B) NUMBER OF LEDs
1= SINGLE CHIP T-1¼ LED
6= 1, 6 CHIP T-1¼ LED
06= 6 (T-1 3mm CLUSTER LED)
07= 7 (T-1 3mm CLUSTER LED)

(C) LED LENS COLOR
WC= WATER CLEAR (SINGLE CHIP)
C= CLEAR (6 CHIPS)

(D) LED EMITTING COLOR & WAVELENGTH

- 1= ULTRA RED (660nm) **OBSOLETE**
- 2= STD. RED (630-635nm)
- U2= ULTRA HI EFF. RED (623-630nm)
- 3= STD. ORANGE (605-610nm)
- U3= ULTRA ORANGE (612-620nm)
- 4= STD. YELLOW (585nm)
- *S4= ULTRA YELLOW (590-595nm)
- 5= STD. GREEN (565-570nm)
- *6NW= ULTRA PURE GREEN (520-530nm)
- *8NW= FLUORESCENT "WHITE" (NO nm VALUE)
- *10NW= ULTRA BLUE (465-475nm)
- *12NW= SOFT WHITE (NO nm VALUE)

*MAX. CONTINUOUS CURRENT 10mA.
*AVAILABLE IN SINGLE AND CLUSTER LED ONLY.


(E) STANDARD DC & AC OPERATING VOLTAGES/mA
SINGLE LED: 5V/25, 12V/25, 24V/25, 28V/25, 36V/12, 48V/12 & 60V/12
6 CHIP LED: 6V/45, 14V/30, 24V/15, 28V/15, 36V/12, 48V/12 & 60V/15
6 CLUSTER LED: 6V/50, 12V/50 & 14V/50
7 CLUSTER: 18V/25, 24V/25, 28V/25, 36V/25, 48V/12 & 60V/15

APPLICATION MUST BE SPECIFIED WHEN ORDERING:
VAC = ALTERNATING CURRENT VDC(V) = DIRECT CURRENT
NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES


DIRECT INCANDESCENT LAMP REPLACEMENTS
124, 158, 159, 161, 168, 184, 192, 194, 259, 280, 400, 464, 555, 656, 657, 658, 758 ETC...

HOUSING MAT'L. UL94VO APPROVED
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

MODEL: WB95

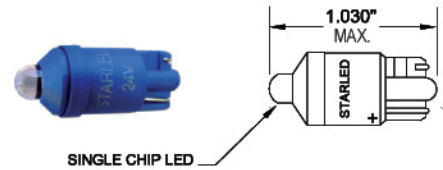

MODEL: WB95

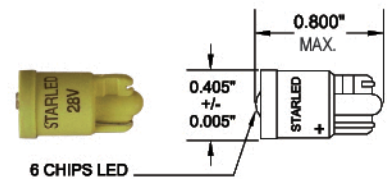

MODEL: WB95

