STARLED®, INC.

T-4½ WARNING LIGHT SINGLE, DOUBLE CONTACT & CANDELABRA SCREW BASE SUPER FLUX LEDs

ORDERING INFORMATION: WLSC4SF (A) R (B) - 24V (C) - DP (D)

TOP VIEW



(A) MODEL

WLCS4SF (CANDELABRA SCREW)
WLSC4SF (SINGLE CONTACT)
WLDC4SF (DOUBLE CONTACT)
WLCS8SF (CANDELABRA SCREW)
WLSC8SF (SINGLE CONTACT)
WLDC8SF (DOUBLE CONTACT)

(B) LED EMITTING COLOR & WAVELENGTH

R = ULTRA HI EFF. RED (623-630nm)
Y = ULTRA YELLOW (590-595nm)
O = ULTRA ORANGE (612-620nm)
G = ULTRA PURE GREEN (520-530nm)
B = ULTRA BLUE (465-475nm)
BG = BLUISH GREEN (498-505nm)
W = FLUORESCENT "WHITE" (NO nm VALUE)
SW = SOFT WHITE (NO nm VALUE)

MODEL: WLCS8SF

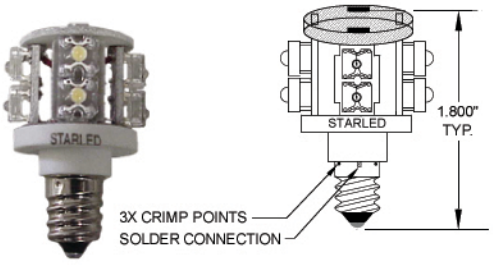

(C) STANDARD DC & AC OPERATING VOLTAGES FOR 4SF

24V, 28V, 36V, 48V, 60V, & 120V

STANDARD DC & AC OPERATING VOLTAGES FOR 8SF

R, Y, AND O Std. Voltages are 24V, 28V, 36V, 48V, 60V & 120V
G, B, BG, W, AND SW 36V, 48, 60 & 120V

NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES.

MODEL: WLDC4SF

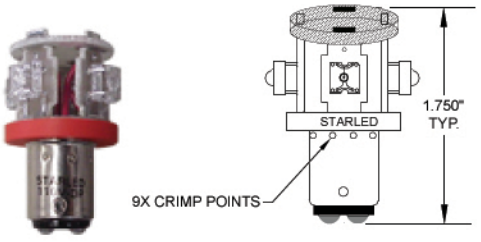

(D) CENTER CONTACT POLARITY

DP = DUAL POLARITY
APPLICATION MUST BE SPECIFIED WHEN ORDERING.

INDUSTRIAL APPLICATIONS

CONVEYOR SYSTEMS
AUTOMATED PRODUCTION LINES
MACHINE TOOLS
PRINTING PRESSES
TEXTILE MACHINES
PACKAGING SYSTEMS
TESTING EQUIPMENT, ETC...

MODEL: WLDC8SF

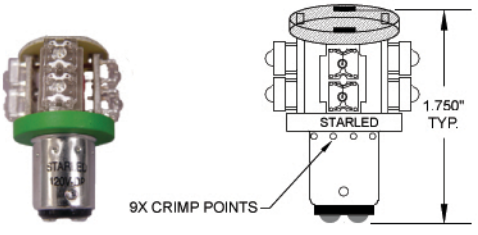

HOUSING MAT'L. UL94-VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

2059 E. DEL AMO BLVD. * RANCHO DOMINGUEZ, CA 90220 * TEL: (310) 603-0403 * FAX: (310) 603-1335